


Connections of the Various Units and Device Interiors

GT25 Series

— SMT Multi-contact Connectors —

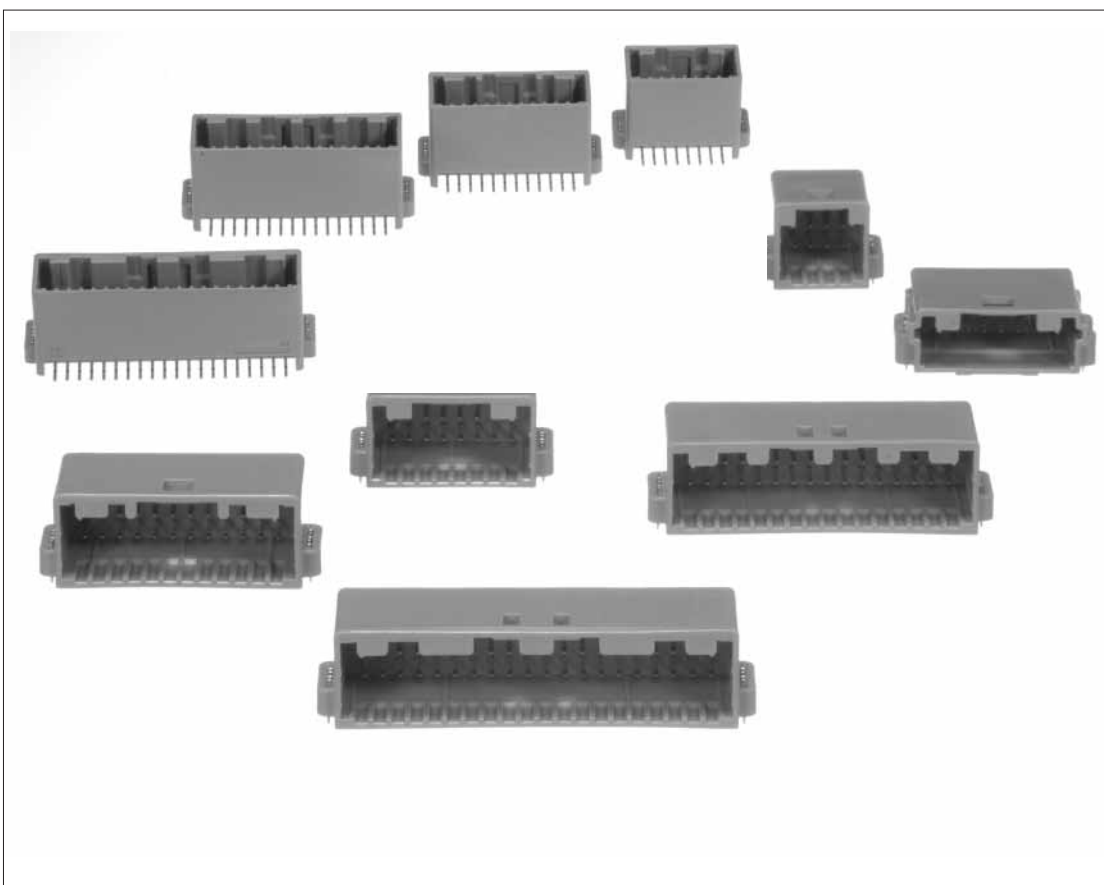

■ Features

- Instead of using screws for securing the connector to the board, a solderable lead reflow type of reinforced fitting is used during reflow.
- Tab width is size 025.

GT 5

GT 13

GT 16

PO5G

GT 11

GT 14

GT 17

GT 19

GT 3

GT 6W

GT 7

GT 10

GT 18W

GT 15

GT 8

GT 9


GT 25

Connections of the Various Units
and Device Interiors


GT25 Series

Right-angle Type


● 8 positions, 1 row

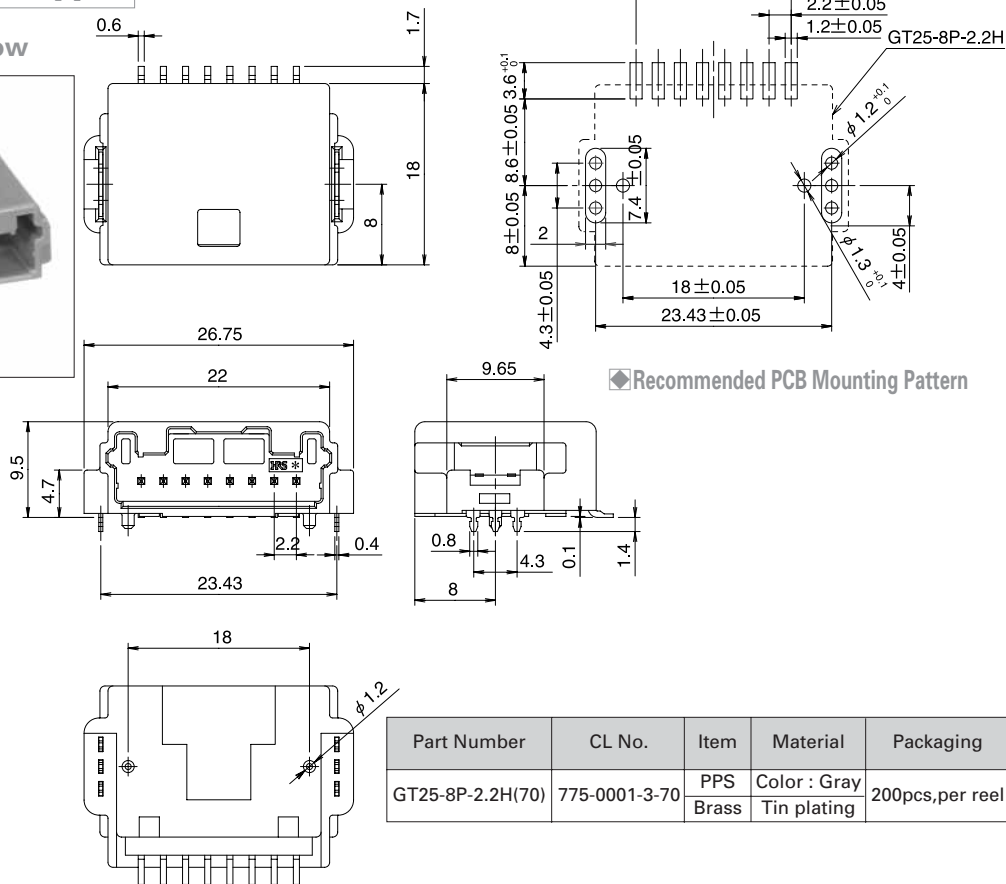

● 8 positions, 2 rows

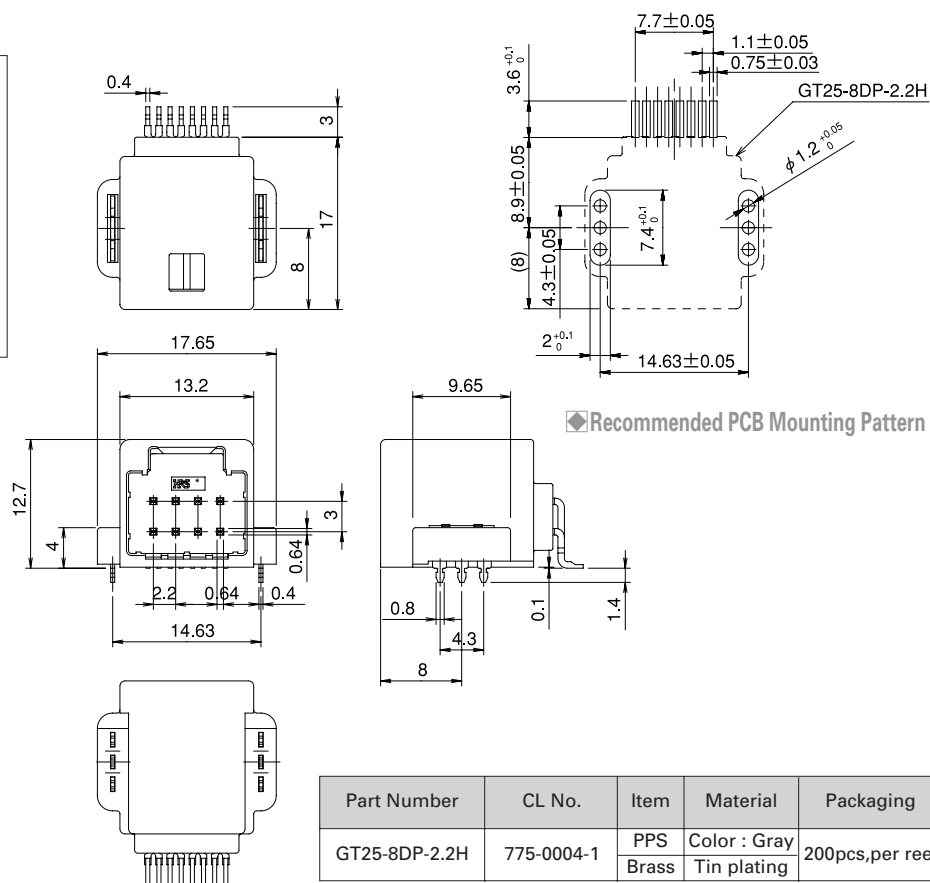


● 12 positions, 2 rows

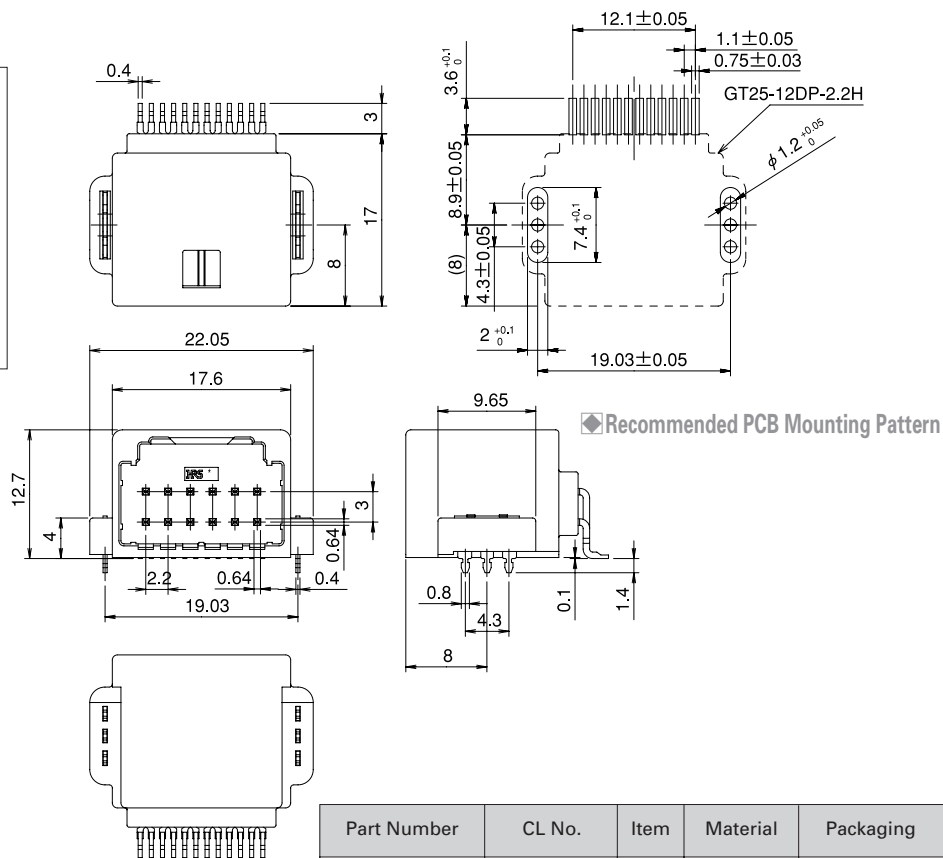

Part Number	CL No.	Item	Material	Packaging	RoHS
GT25-12DP-2.2H	775-0005-4	PPS	Color : Gray	200pcs,per reel	YES
		Brass	Tin plating		

● 16 positions, 2 rows

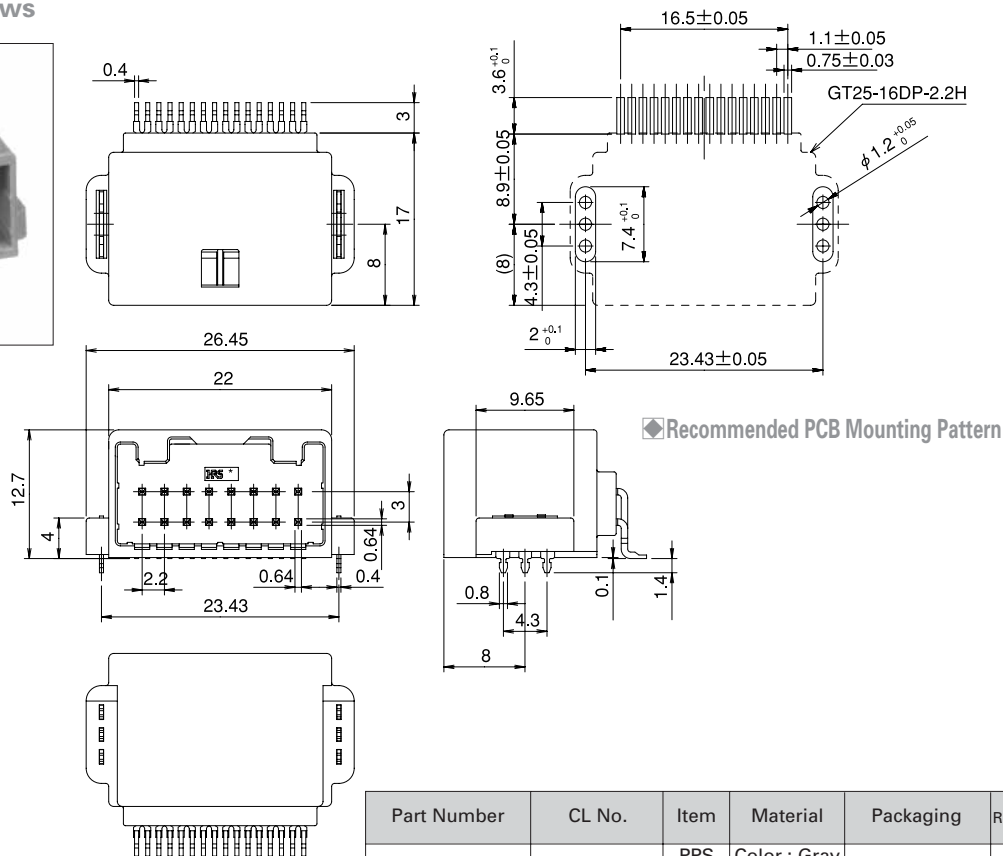

Part Number	CL No.	Item	Material	Packaging	RoHS
GT25-16DP-2.2H	775-0006-7	PPS	Color : Gray	200pcs,per reel	YES
		Brass	Tin plating		


- GT 5
- GT 13
- GT 16
- PO5G
- GT 11
- GT 14
- GT 17
- GT 19
- GT 3
- GT 6W
- GT 7
- GT 10
- GT 18W
- GT 15
- GT 8
- GT 9
- GT 25

Connections of the Various Units
and Device Interiors


GT25 Series

- GT 5
- GT 13
- GT 16
- PO5G
- GT 11
- GT 14
- GT 17
- GT 19
- GT 3
- GT 6W
- GT 7
- GT 10
- GT 18W
- GT 15
- GT 8
- GT 9
- GT 25



● 24 positions, 2 rows

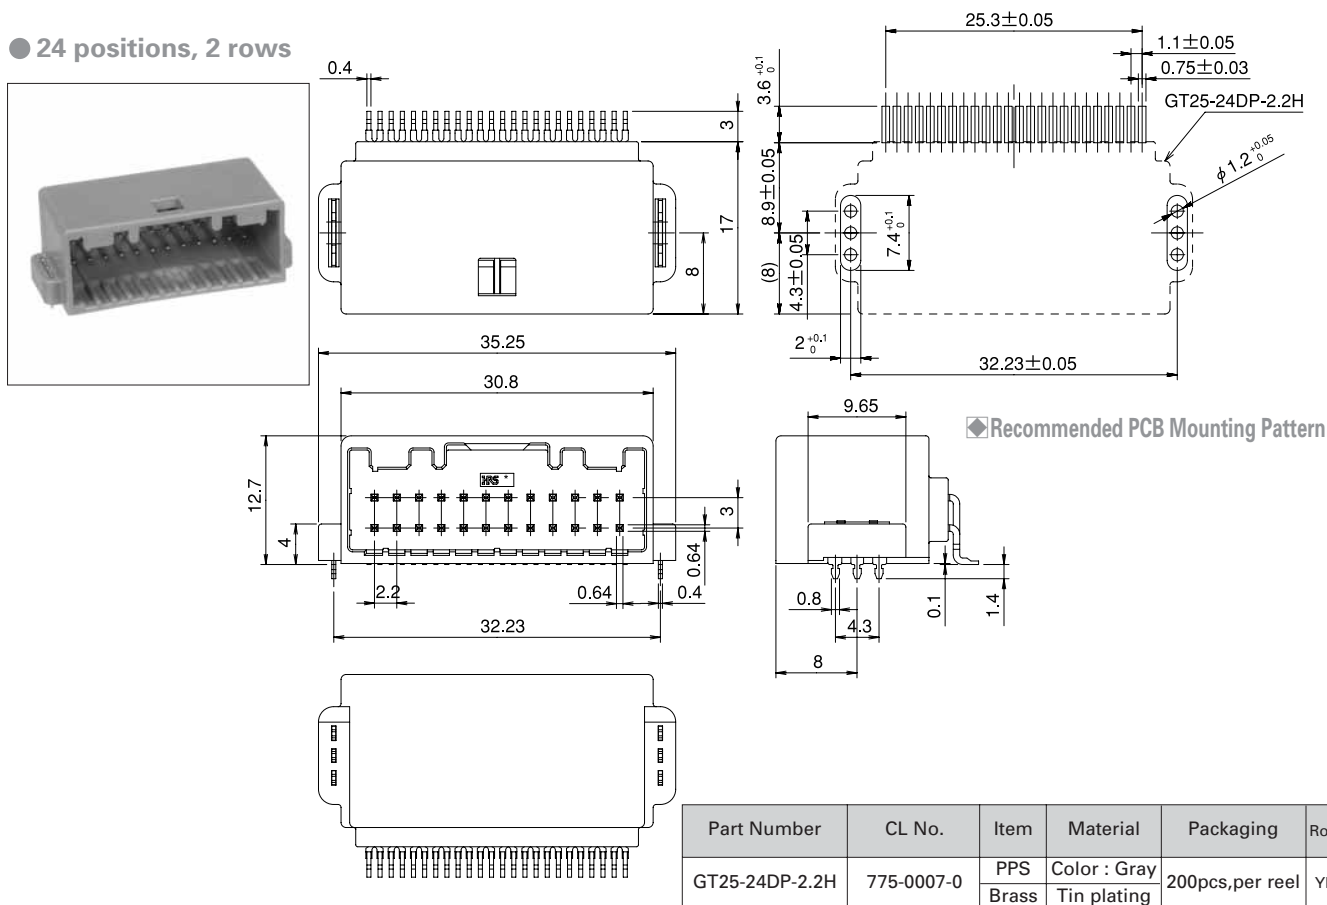

● 32 positions, 2 rows

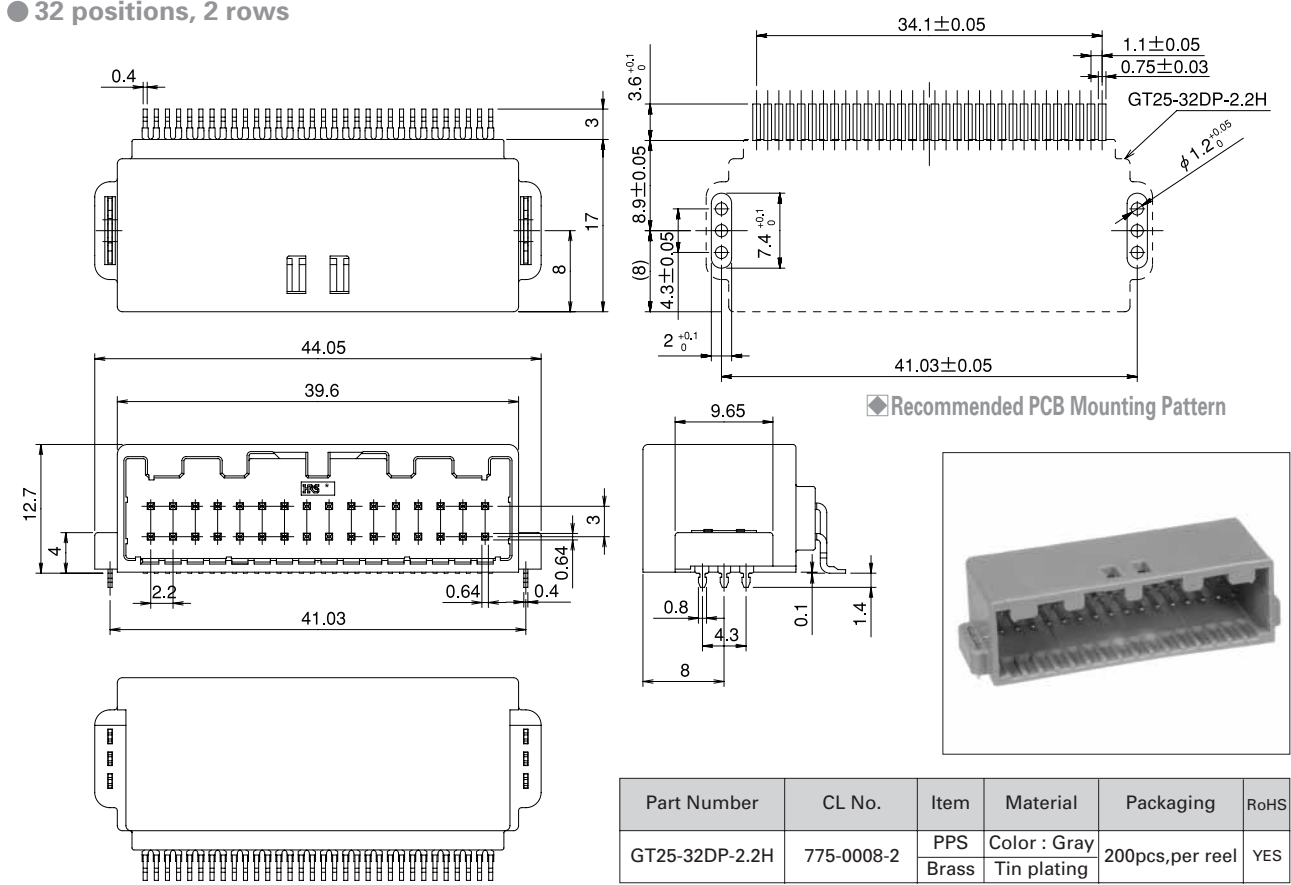

● 40 positions, 2 rows

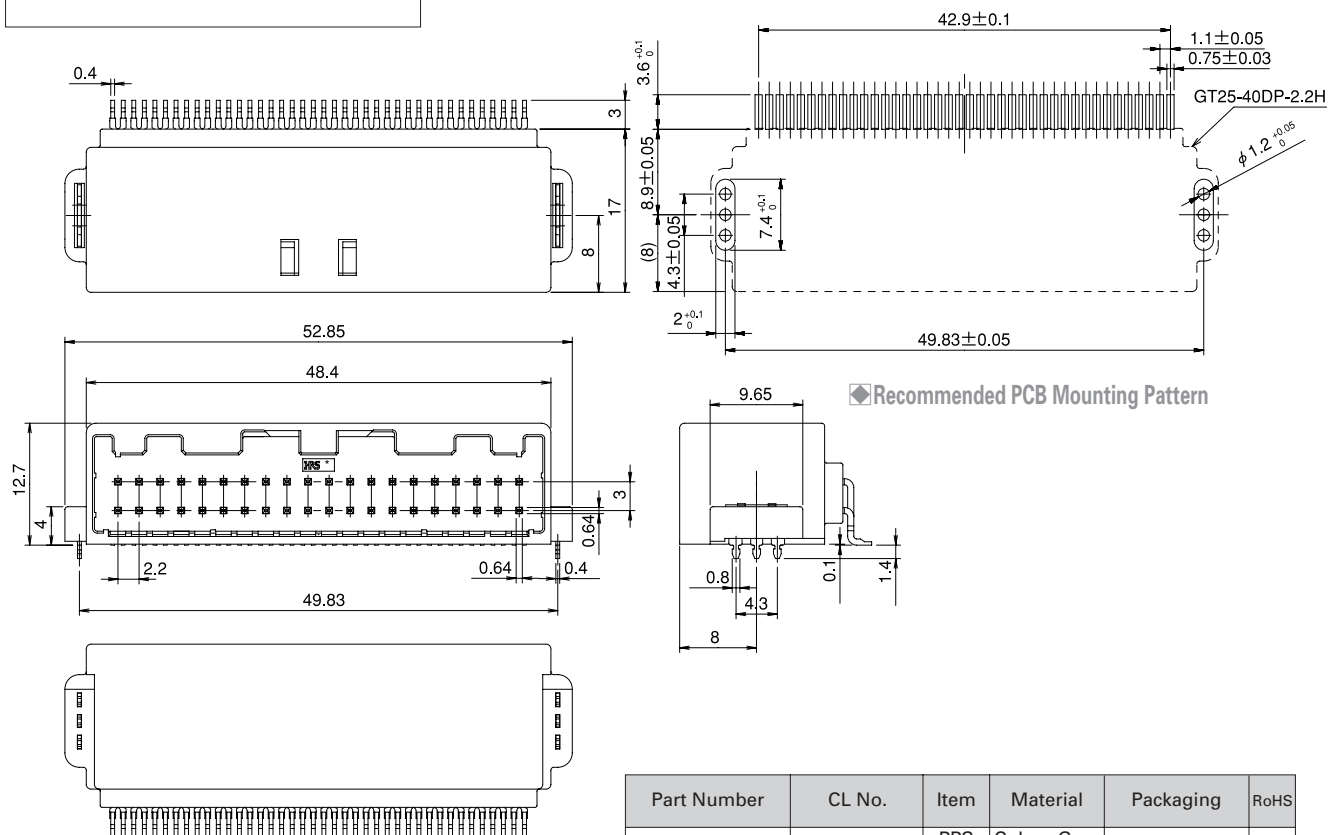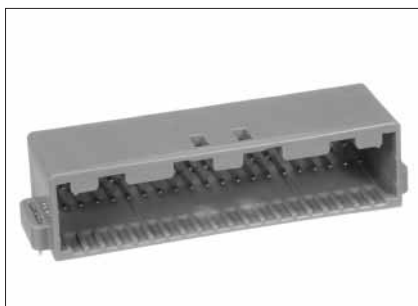

Part Number	CL No.	Item	Material	Packaging	RoHS
GT25-40DP-2.2H	775-0003-9	PPS Brass	Color : Gray Tin plating	200pcs,per reel	YES

- GT 5
- GT 13
- GT 16
- PO5G
- GT 11
- GT 14
- GT 17
- GT 19
- GT 3
- GT 6W
- GT 7
- GT 10
- GT 18W
- GT 15
- GT 8
- GT 9
- GT 25






Connections of the Various Units and Device Interiors

GT25 Series


- GT 5
- GT 13
- GT 16
- PO5G
- GT 11
- GT 14
- GT 17
- GT 19
- GT 3
- GT 6W
- GT 7
- GT 10
- GT 18W
- GT 15
- GT 8
- GT 9
- GT 25

Straight Type

● 16 positions, 2 rows



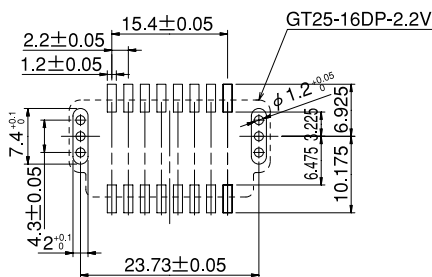

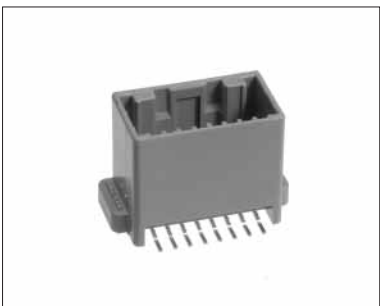


◆ Recommended PCB Mounting Pattern




Part Number	CL No.	Item	Material	RoHS
GT25-16DP-2.2V	775-0020-8	PPS	Color : Gray	YES
		Brass	Tin plating	

● 24 positions, 2 rows


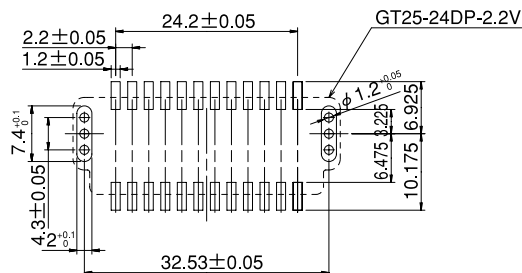




◆ Recommended PCB Mounting Pattern





Part Number	CL No.	Item	Material	RoHS
GT25-24DP-2.2V	775-0021-0	PPS	Color : Gray	YES
		Brass	Tin plating	

● 32 positions, 2 rows

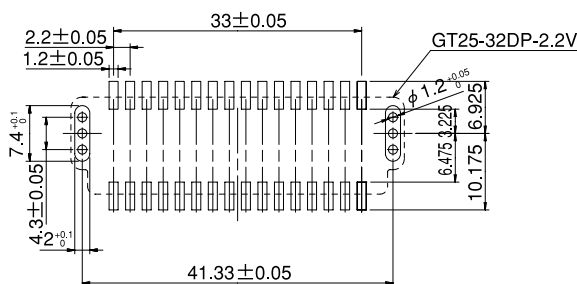

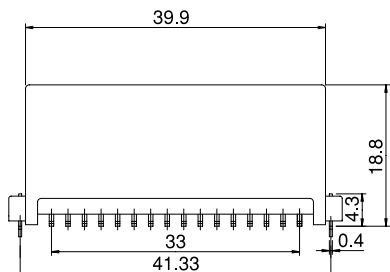
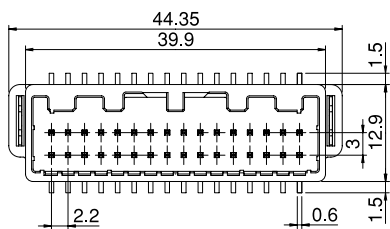


◆ Recommended PCB Mounting Pattern

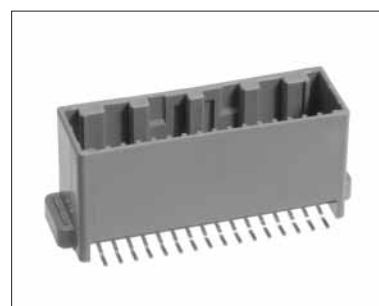



Part Number	CL No.	Item	Material	RoHS
GT25-32DP-2.2V	775-0022-3	PPS	Color : Gray	YES
		Brass	Tin plating	

● 40 positions, 2 rows

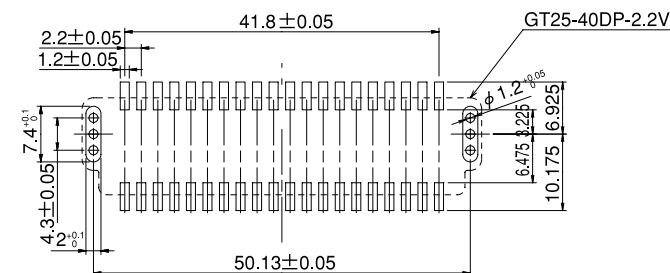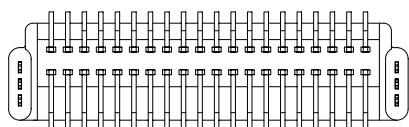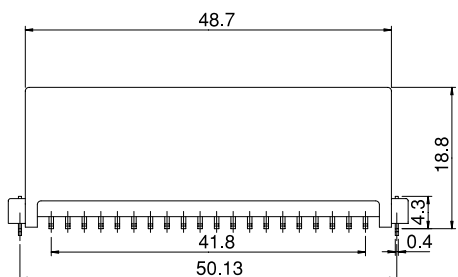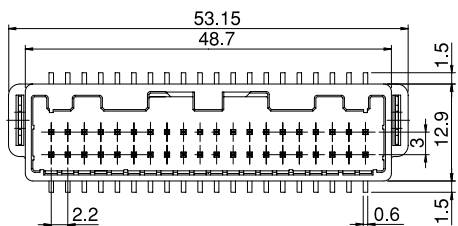

◆ Recommended PCB Mounting Pattern

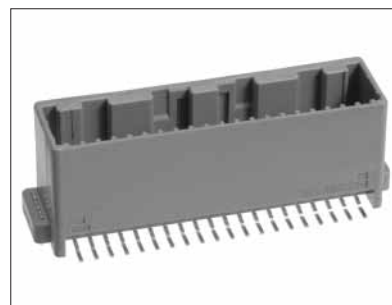

Part Number	CL No.	Item	Material	RoHS
GT25-40DP-2.2V	775-0014-5	PPS	Color : Gray	YES
		Brass	Tin plating	

- GT 5
- GT 13
- GT 16
- PO5G
- GT 11
- GT 14
- GT 17
- GT 19
- GT 3
- GT 6W
- GT 7
- GT 10
- GT 18W
- GT 15
- GT 8
- GT 9
- GT 25

Connections of the Various Units
and Device Interiors