

Hirose Korea Card(=PCB) Edge Connector

KP17-Series


- 1. -----page 1
- 2. -----page 2~3
- 3. -----page 2~3

No.		Pin		page
1	KP17-14S-2H	14	2Pitch ,4.3mm ,Card Edge	2~3

4.Reflow profile (Lead-free)-----page 4

KP17 - 14S-2H

2.0mmPitch, 4.3mm height, Single contact, Non ZIP Type, Card(=PCB) Edge Connector.

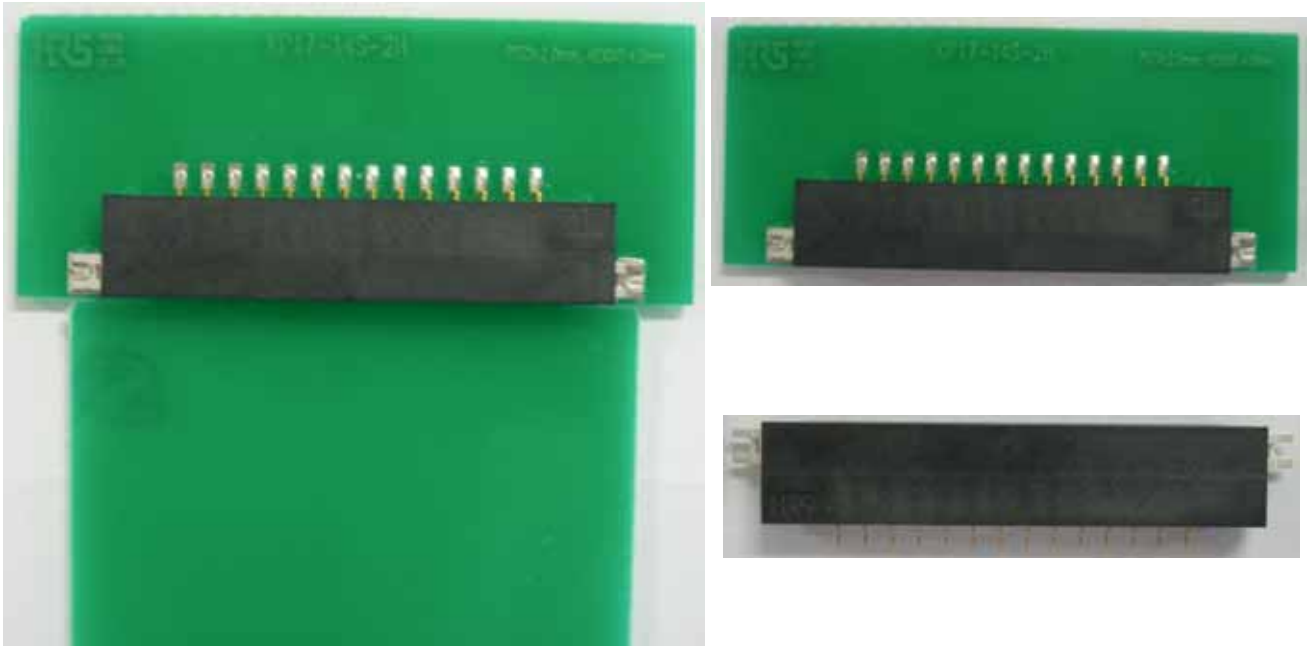

Feature


1. PITCH 2.0mm, HEIGHT 4.3mm PCB Edge Type Connector
2. Non-ZIP Type
3. Off-set Type
4. / 가
5. PCB
6. RoHS Halogen Free

Part Number


KP17 - ** S - 2 H

	Serial Name	ID
	Contact	Pin : 14
	Contact	S : Socket
	Contact Pitch	2.0mm
	Solder	H : Horizontal mounting type

KP17 - 14S - 2H

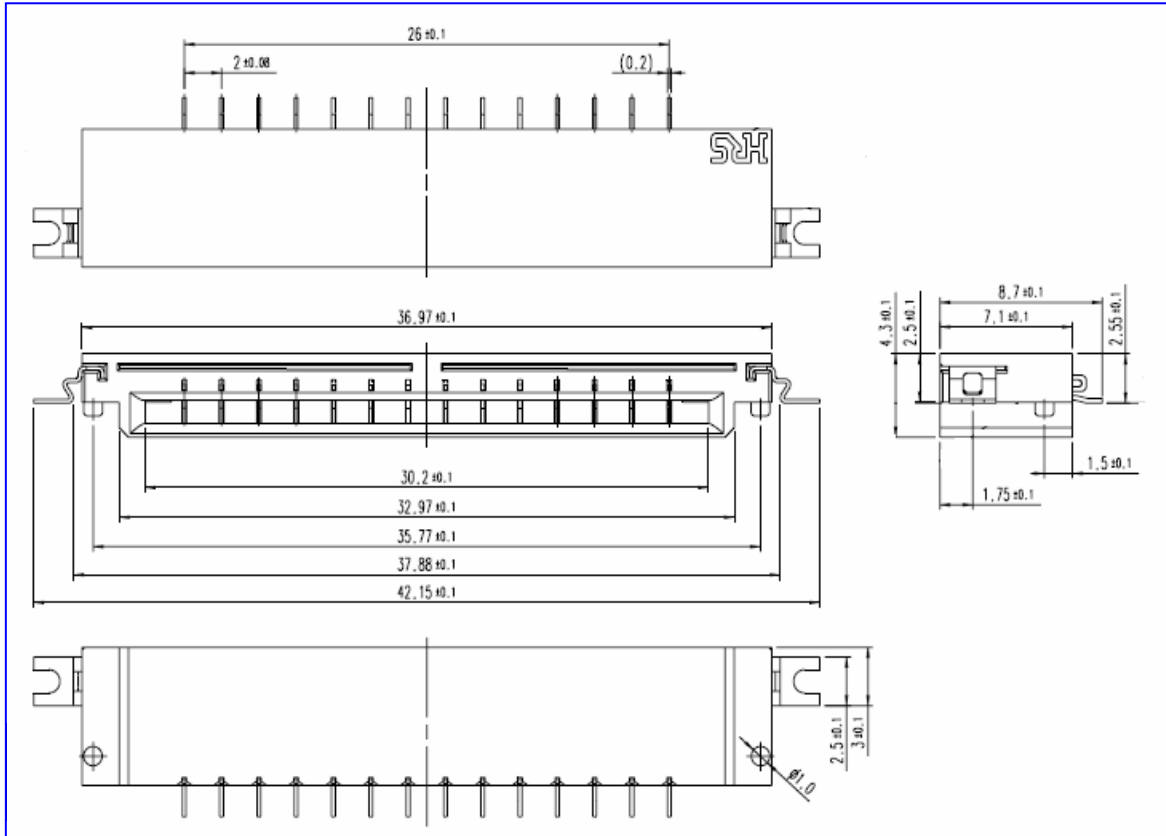

PCB LAYOUT

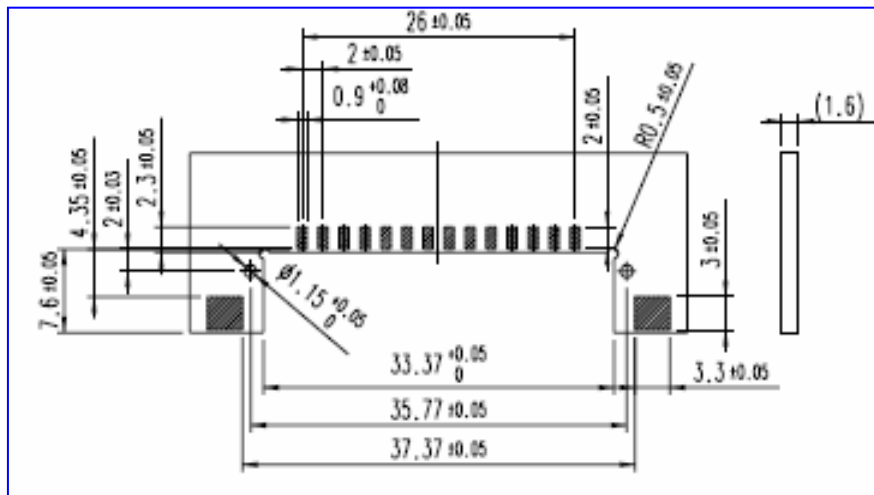


Packaging Specification

- : Embossed Carrier tape(Anti-static)
- : 1,000pcs/Reel

Reflow Profile

Using Lead-free Solder Paste

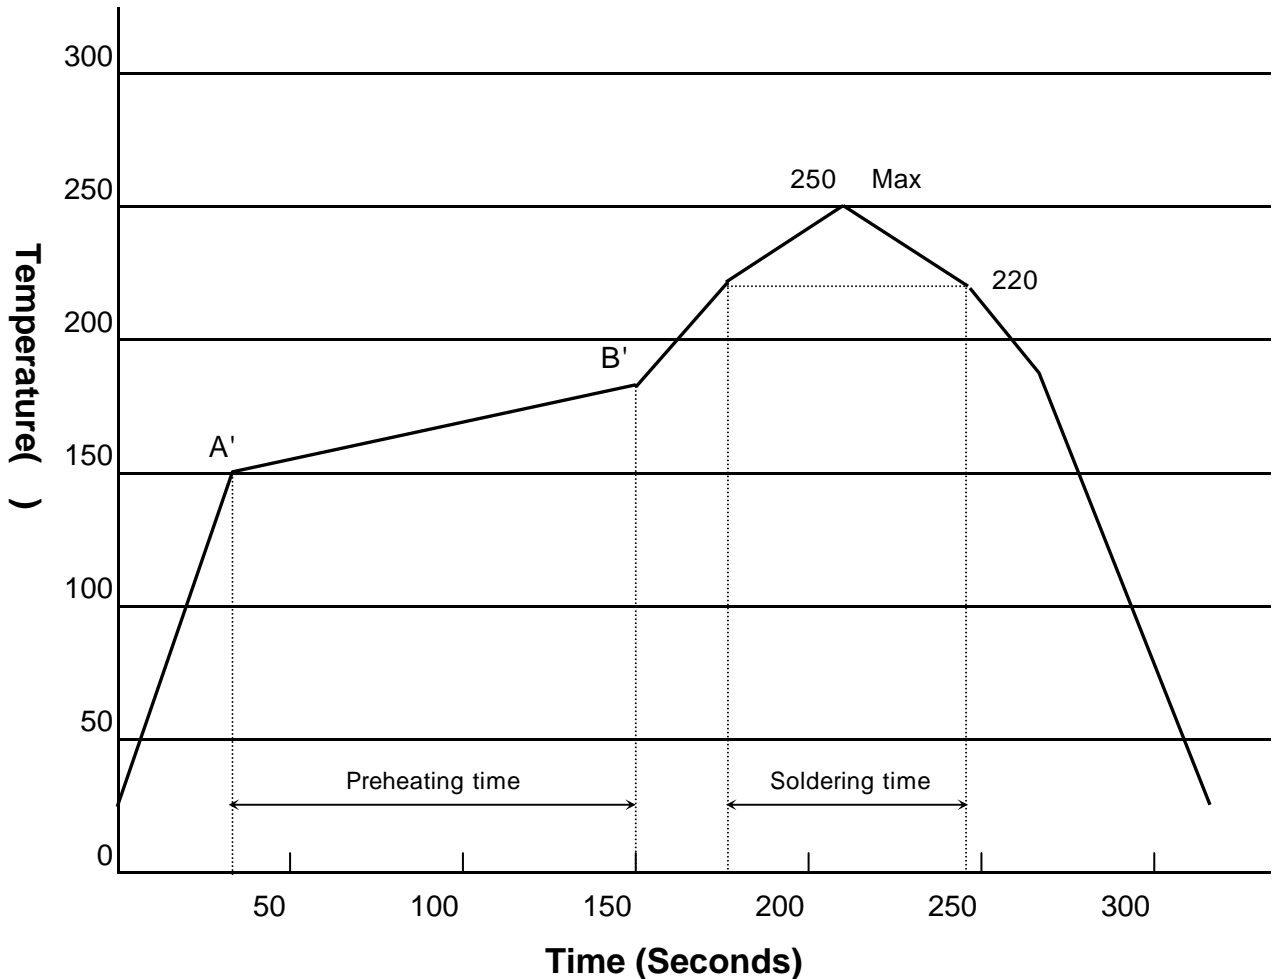

Recommended Application Conditions

Reflow System: IR reflow

Solder: Cream type Sn / 3 Ag / 0.5 Cu

Flux content 11%wt

Metal mask thickness: 0.15mm

Preheating time: 150 ~190 , 90±30seconds

A'=150 ~170 , B'=170 ~190

Soldering time: 260 Max

220 Min, 30~60 seconds